
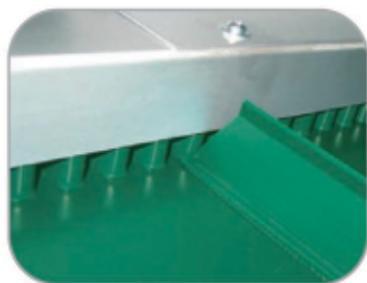
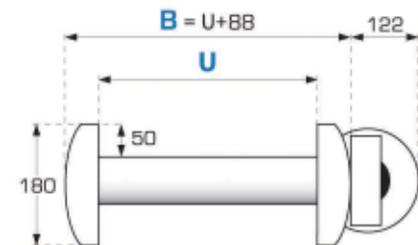


**Nastro Inclinato
Convoyeur Incline
Inclined Conveyor**

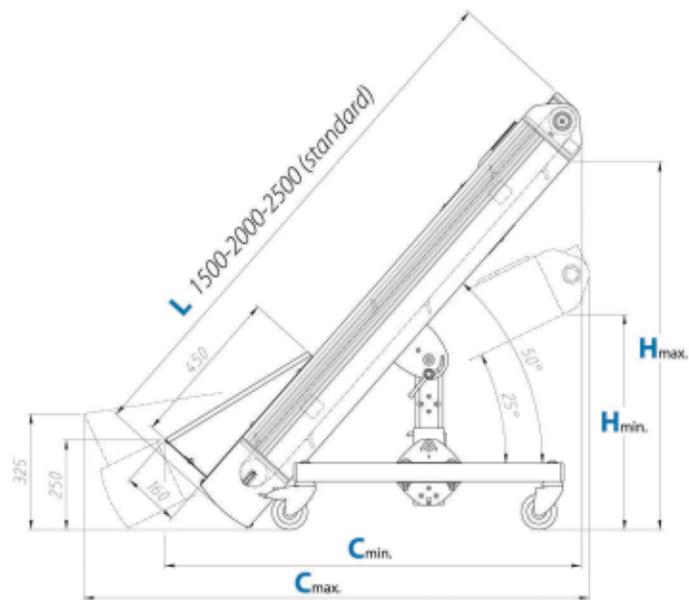

Inclined Conveyor

normally installed at the side of the operating machine for unloading into containers or working bench or for filling/evacuating granulator. The belt can be combined with the rolls separators or spiral. It is usually mounted on wheels, but if large size is also mounted on fixed structures.

installed with PU smooth strips, supergrip belt, when used to load granulator or evacuation is recommended to smooth the belt strips with spondaflex.

AL-NI-1	U: 246	C: 1200/1450	H: 600/1000
AL-NI-2	U: 346	C: 1200/1450	H: 600/1000
AL-NI-3	U: 446	C: 1200/1450	H: 600/1000
AL-NI-4	U: 246	C: 1530/1900	H: 800/1400
AL-NI-5	U: 346	C: 1530/1900	H: 800/1400
AL-NI-6	U: 446	C: 1530/1900	H: 800/1400
AL-NI-7	U: 246	C: 1850/2350	H: 1000/1800
AL-NI-8	U: 346	C: 1850/2350	H: 1000/1800
AL-NI-9	U: 446	C: 1850/2350	H: 1000/1800