


NS

Nastro Snodato
Convoyeur Flexible Bas
Conveyor Articulated Below

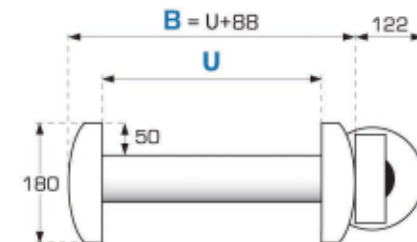

Conveyor Articulated Below

as used to be joined to the presses. With the lower flat elongated suitably is inserted into the press compartment or under the unloading of the blow molding machines. The inclined portion is adjustable to accommodate as much as possible to the discharge

height, and can be of different lengths. On the exhaust can be fitted with rollers or spiral separators.

It can install any type of belts, smooth, or supergrip plugs, or with flexible sides, or for high temperature.

AL-NS-1	U: 246	C: 1580/1900	H: 600/1000
AL-NS-2	U: 346	C: 1580/1900	H: 600/1000
AL-NS-3	U: 446	C: 1580/1900	H: 600/1000
AL-NS-4	U: 246	C: 1900/2350	H: 800/1400
AL-NS-5	U: 346	C: 1900/2350	H: 800/1400
AL-NS-6	U: 446	C: 1900/2350	H: 800/1400
AL-NS-S (speciale)	Altre dimensioni su richiesta Andere Abmessungen auf Anfrage Other dimensions on request		